


Smart watch

User Manual



LEADING A HEALTHY LIFESTYLE



Charging instructions:

Magnetic data cable, as shown in the figure below, the watch is reversed, the charging wire is aligned with the charging contact at the back of the watch, and charging begins. It takes about 70 minutes to charge and can be fully charged.

⚠ Caution: Do not make the magnetic charging cable any 2 pins connect with conducting material at same time, it may cause short circuit.

Thank you for choosing our scompany products. You can read this manual to get a comprehensive understanding of the function and operation of the device. The company reserves the right to modify the contents of this manual without prior notice without prior notice.

Product configuration: one package, one manual, one smart band

This product supports IP68 waterproof, it's available to wear it while wash hands, swim etc. Hot water shower or sauna cannot be worn to prevent steam. If the water is not used according to the instructions, the company will not make a free warranty.

Operation instructions:

The side top button: short press enter pedometer, will show steps, calories, distance.

The side bottom button: long press to switch watch, short press to return to the standby interface, when watch crashed, long press 10 seconds to restart .

Main function introduction:

Dial: Bluetooth call via cellphone, talk at the watch end.

Phonebook: Sync all the contacts in the cellphone, max is 400 person. Call logs: Sync all the calls history in the cellphone.

SMS: Sync all the messages in the cellphone (Not support iOS phone yet).


Bluetooth: Search the device you want connect, or disconnect the devices.

Notification: It will remind all the notifications from cellphone, such as Facebook, Email, WhatsApp, SMS etc. It has to connect "Fundo" first.

Sleep monitor: The smart watch will turn on it automatically from 9p.m to 9a.m. It records your sleep duration and quality, help you adjust a better rest time, improve sleep quality. Slide up enter options; Status, On and Off; History, check out deep sleep and light sleep; instruction.

Heart rate monitor: wear the watch tightly with your wrist, best position would be upper of the hand-wrist, around 20 seconds it will shows the real time heart rate data, slide down menu into history, mode includes single measure and continuous measure; and instruction. Generally speaking normal value is 60-90 times/min.

ECG: adopt optical heart rate and ECG combine technology, about 30 seconds can show the data, after test will appear ToAPP, means ECG data save to phone "Fundo".

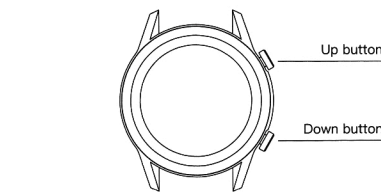

TP gestures: slide right/left/up to enter the main menu, after entering each function, slip from left to right for return, slip from right to left for confirmation.

Watch face switch: long press the screen, there will be a dial choice, tap confirm.

Status bar: slide down to enter, it tells Bluetooth status, battery life, time etc.

The connection between the watch and the mobile phone:

First, the mobile phone needs to download the APP "Fundo" to the mobile phone and install it, two ways



一、iOS, Android Mobile User:
Scan the next QR code through the mobile browser, or use scanner to scan and download the Fundo App.

二、Android Mobile User searches "Fundo" Play Store and download. iPhone User searches "Fundo" on App Store and download.

After installation, turn on cellphone Bluetooth and Fundo App, confirm the notification enable, tap "More" at right bottom corner, enter add device, search "L13" device and tap connect, then you are succeeding connected the Bluetooth 4.0;

Multi-languages: Auto synchronization is turned on by default. After the mobile phone is connected, the mobile phone language will be synchronized. To manually select the language, turn it off;

Blood pressure: in the measuring time, please lay the hand flat, about 48 seconds later will show the data. Generally speaking, blood pressure increases with age, female lower than male.

Time synchronization: the default is on, after connecting to the phone will sync the phone time, if you want to manually adjust the time, you need turn it off;

Stopwatch: Single timing, tap the left icon to start timing, and tap to pause, tap again for cumulative time.

Volume: adjustable volume for media, ring tones, notifications, etc.;

Power-saving mode: turn watch on to enter clock mode, other functions are turned off; display, access to adjustable screen brightness and backlight off duration;

Unit: select the data unit is metric or imperial;

Sedentary: Set a long-time reminder of sit, remind you have a stand when time up.

Clock: clock type, there are 4 standby watch faces to choose;

Next go to watch side Bluetooth-searching Bluetooth -select turn on Bluetooth-tap your cellphone name in the list-confirm the connection at your cellphone end. Then you are succeeding connected Bluetooth 3.0;

Only when Bluetooth 3.0 & 4.0 both connected the watch can be abled full performance, slide down the watch you will see the Bluetooth icon, green color at upper means Bluetooth 3.0 is connected, Blue color at bottom means Bluetooth 4.0 is connected.

As the Bluetooth protocol is different between all the mobile phone brands. Sometimes the Bluetooth connection will be instability between mobile phone and smart watch. Please restart the Bluetooth, then try to connect again, or restore factory settings. If appear system halted, please long press power button about 10 seconds to restart watch.

Sound: you can select the caller profile, select Ringtones, select notification ringtones;

QR code: enter into QR code, mobile browser open scan can download "Fundo"

Alarm: can setting 5 alarm, long press can cancel alarm.

Restore the factory settings: generally, if there is a software problem happens, restore the factory settings can be resolved;

About: you can view the watch model and software version.

Data transmission: mobile phone to download Fundo App, after the connection is successful, either steps data, heart rate data, the sleep quality, multiple sports can be transmitted to the mobile end.

Warranty:

1. If it appears quality problems caused by manufacturing, materials, design within one year (since the day of purchase) , we will offer free warranty for main part. We will offer free warranty for battery and adapter within 6 months. Premise is using normally and correctly.

How to set the notifications:

Go to phone settings - application management, in "Fundo" - permission management, turn all on. Notification management - turn "Fundo" all permissions on. Open "Fundo" App - More - App Notification Push - Turn on background run permissions.

Note: make sure that all the third-party Apps which you want receive notifications in the device make sure your phone is enable to receive the notifier in the phone notification bar.

What if I don't receive the notifications?

First of all, the notification function of the watch is only to synchronize the notification function of the mobile phone, such as incoming email, Facebook, WeChat reminder, if your mobile phone has not received the notification, then the watch end is not received, to set up in the mobile phone - notification function, find corresponding APP, to allow the notification to open.

2. About the fault caused by the users' personal reasons, we don't offer free warranty, as follows:

- 1). Disassemble or refit the product.
- 2). Caused by immodesty drop
- 3). All artificial damage or misuse (such as: make water into the host, the external force shatter, scratch damage of peripheral components, etc.), all these are beyond the scope of the warranty.

3. When ask for free warranty, you must provide a warranty card with the seal of purchase place and purchase date.

4. If you met problems during use, please contact the shop customer service which you bought from.

5. Please make the final products as the standard.

Date of purchase:	Customer signature:
IMEI code:	Clerk Signature:
Buy store:	Shop stamp: