

User manual for Bluetooth smart watch

※ Thank you for choosing our watch devices. You can completely understand the method of using it and realize its perfect function and concise operating methods by reading this manual.

※ **Bluetooth version: BT4.0**

※ **Remark:** Please connect the watch to mobile phone via Bluetooth successfully before using the watch.

※ **The requirement about mobilephone operation system version**

Android users: support the original operating system Version 4.44 or higher. (Settings>About Device, view the android version)
Iphoneusers: supportversion 8.0 or higher. (Please update your phone if it's not 8.0 version, you can find it in mobile phone setting-general-about)

How to download Fundo

How to get the Fundo APK for Iphone and Android users

1. For both Android and Iphone users: Scan the QR code on watch or user manual through

smart phone or Qqsweeping function to download and install on phone:



※ Tips:

WeChat only supports QR code scanner to read, doesn't support downloading. Please make sure your phone have enough memory space and the operating system version is supported

2. Download the Fundo Wear from Google play store and APP store;



※ Fundo Wear register and log-in, bluetooth connection

1. After installing the Fundo Wear, enter into mobile phone setting -bluetooth-open (Android should be visible, iPhone should open location services, setting-privacy-location services-on)

will be estimated as one step, which detects whether you are walking or not. You can set the target step number in daily exercise (you will be reminded after reaching the target). Personal information settings (height, weight) Historic record: a historical record about the step number of daily exercise will be generated in the morning.

Sleep monitoring

Enter the sleep monitoring menu, click "Start" and then wear it in hand and go to bed, user sleep quality can be monitored according to vibration amplitude of the watch and duration of sleep, and a historical record about sleep duration and quality will be generated automatically in the morning every day, up to twenty historical records can be generated.

Display style

Different display style for option

Reminder for long-time sitting

Click into the reminder menu for long-time sitting, you can set your own time period (in half-hour increment), and the watch will ring and vibrate to remind you exercise after long-time sitting.

Heart rate & ECG

Please make sure to wear the watch suitably before

measuring heart rate and the watch should be glued to the skin closely. Click Start to measure the heart rate. (Please don't move your arm) A historical record will be generated for each data measurement automatically, up to 20 historical records can be generated.

Record

You can record and play local audio files.

Siri

This function is only for iPhone. By the Siri, you can give the commands through watch to use the related functions on iPhone.

QR Code

Scan the QR Code by QQ sweeping or sweeping on Android phone, press download and install.

Stopwatch Calculator

For calculation

Settings

Bluetooth settings (you can activate and turn off Bluetooth, if there is any paired device, you can disconnect the Bluetooth to close; you can turn off the device, if there is any paired device, it will go into automatic shutdown.)

2. Open Fundo Wear after completing the phone settings, login screen will pop up, you can register by email, or login by QQ/WeChat account.

3. Enter into the Fundo interface, click the "+" at the right bottom corner, bluetooth icon will appear, click it to search. After searching, click the watch name to connect, a pairing message will come out, choose "Pair". Fundo connection is successful, Android users can use all the functions on SmartWatch.

4. For iPhone users, after connecting with the Fundo successfully, enter into phone settings-bluetooth-on, search the watch name and connect, pairing message will come out, choose "pair", then you can use all the functions on watch.

※ Tips

For iPhone Users, when Fundo occurs flash back, please make sure your location services is on

Please make sure your Fundo is register successfully, or the relevant data can't be sync

If there is no prompt message during bluetooth

Clock: You can set different types of clock and set the time and date in watch after closing synchronization functions.

Sound: You can customize the notification tone, ringtones and notification tones in watch.

Volume: You can adjust the volume of multimedia, ringtones and notification tone in watch.

Display: You can customize the wallpaper, screen brightness and backlight turn-off time in watch.

Movement: When this function is set to be open and saved, ringing from incoming calling and alarm clock can be converted to mute automatically by turning over the watch. Under the turn off status, turn over the watch and the screen will be bright automatically.

Multilingual environment: personality setting the synchronize, language, name display automatically

connecting, maybe because connect the wrong device. You can open the settings-about on watch, and check if the bluetooth device address is the same as your connected device. If not, please choose the right one.

※ Instruction to watch operation

Side button: long press for switch ON/OFF, short press for return back to menu

TP gesture (secondary or third menu): Slip from left to right means turn back; from right to left means confirm; Switch the interface by sliding left and right.

Introduction to Menu Functions

Click on the menu and view all contact list (about 500 contacts), search for any contact quickly and call him/her.

Dial

Dial via the watch after connecting with your phone

Call record

Enter into the menu and can synchronize all call records on your phone, click on the record and can call them again

message

Please install the Fundo Wear on your phone before using this

function: Click on the menu and view all inbox messages, reply to the sender in SMS templates and make phone call. (view the SMS menu in IPHONE is not allowed)

Notification

You can synchronize all instant messages on the phone.

Find phone

Press this function, phone will have an alarm and vibration. If the bluetooth signal is unstable or distance between watch and phone is longer than 10 meters, watch will have an alarm.

alarm

You can have 5 custom alarm-clocks. Prompt setting: Vibration and ring/Vibration/Ring. Return back to the clock menu, set the switch as ON station

calendar

Enter the calendar interface and slide up and down as well as left and right to exit

Music

Click to enter the menu and can synchronize all the songs in the paired phone, click on any one song to play, adjust volume, pause, skip the song and so on.

Turn off the music when recording, connect again if need to play the music

Remote camera

Enter into the menu to open the camera on the paired phone (unlock the phone at first), you can preview the image, click on the shoot, pictures can be stored in the paired devices (but every phone has a different store path, pictures may be stored in albums or memory card, viewing pictures at once is not allowed through some kind of phone, you may view pictures a few minutes later or by restarting the phone. This phenomenon has nothing to do with the watch, it depends on different mobile phone models). The function is not allowed in IPHONE.

Bluetooth connection

Open this function, you can see the following menu: Bluetooth sync, search for the other bluetooth device and send a pairing connector. Bluetooth setting: Bluetooth ON/OFF setting and amend the device name

File management


Enter in this function to view the photos, video, audio files in the watch

Pedometer

normal arm swing will start step counting during walking, the first ten steps

The schematic of shorten the watchband

Change the length by yourself: with the help of the tool (you can find it in the gift box), take out No. 2 or No. 3 surplus watch chain and keep No. 1 and No. 4 (like the picture shows) (Attention: this action may scratch the watchband, we don't recommend)

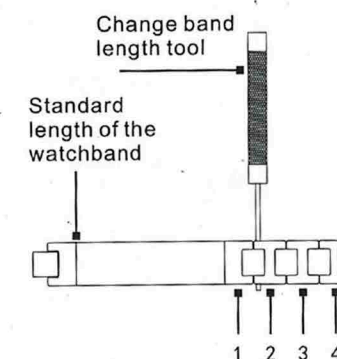

Please contact the watch repair stores to change the band length