

Children's smart watches (security guard) quick start guide



- Low Power Alarm
- Remote Power Off
- Make Friends

3. Watch Presentation



Please read the instruction manual before use in order to install the APP and use the watch correctly and quickly.


1. Preparation

Testing equipment model, and check the accessories.
Selecting GSM network SIM card, refer to the advise of the dealer (Before inserting card, please keep power off)
Watch SIM Card need to open GPRS function and Caller Identification function.
Scan the QR code to download the APP and install the APP on your smart phone
Registering the watch by bar code or QR code.

2. Product Function

- GPS+LBS positioning way
- GPRS real-time positioning,tracking,monitoring
- Phone book
- Intercom
- Health Function
- History route
- Alarm Clock
- Safety Zone
- SOS Emergency Alarm


4. Interface instruction

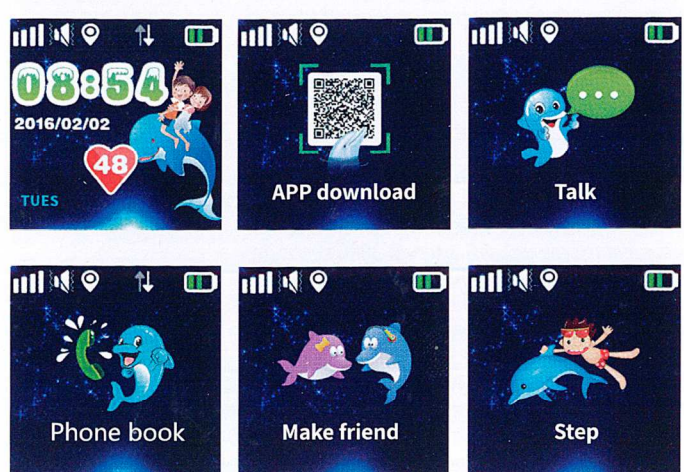

4.1 Main Interface, the top icons are GSM signal, Alarm mode, Locator icon, Networking symbol, and Battery, the below are time and date.
4.2 Phone Book, enter this function and see the 15 sets of phone numbers, choose and dial out.

- 1.Set SOS number: three sets of phone numbers can be set up, users click SOS button on watch to dial the SOS numbers, twice if nobody answers.
- 2.Monitoring: generally for parent's phone number. The watch will dial back automatically, parent can hear the sound around kids, but kids can not hear parent's voice.
- 3.Do not disturb: users can set three periods in case disturbance in kid's class time.
- 4.SMS alerts Settings: low power, SOS, remove the watch.
- 5.Phone Book: 15 sets of phone numbers available.
- 6.Restore the default work mode: GPS working for whole day, update the position once 10 minutes.
- 7.Remote shutdown: users can not turn off the watch with SIM card inside, only for remote shutdown.
- 8.Make friend: Make Friends, enter this interface and two watches touch each other to make friends, the watches send OK message when succeed, one friend only for each watch.
- (4)GEO fence: minimum fence radius is 500 meters, the watch alarms if the kids run out of the safe area.
- (5)Love reward: select the hearts on the app and send to watch, the watch screen shows the love hearts.
- (6)Look for mobile phone: users just need to send a code to watch, the watch rings for 1 minute. And users stop the ringing by press any one button on the watch.

5.2.2"My" interface:

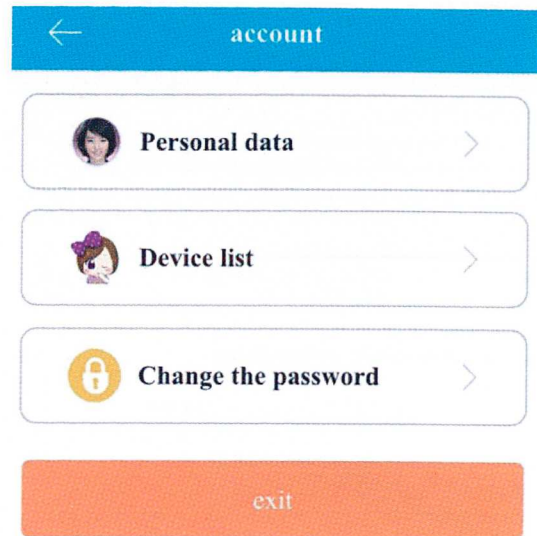

Note: users can check the registered ID in Device List, if the ID is different from the ID number on the watch back, the watch can not be connected with APP.

5.3 Watch alarm instructions

Users can check all alarms detailed information in APP.

6. Watch work mode

Three basic working mode, normal mode, power saving mode and Follow mode, the upload interval differs from different working modes.

Normal mode: upload interval 600 seconds;

Power save mode: upload interval 3600 seconds;

Follow: upload interval 60 seconds;

7. Watch and related instructions

7.1 Watch SOS emergency alarm

Long press the SOS key 2, watch the screen SOS, watch the state of alarm, circular dial three SOS number two rounds.If the call is not continue to call, no answer has been dial until the end of the two rounds.Watch can send text messages to monitoring number (default off), at the same time send alarm notification to the APP.

7.2 Low power alarm

Watch battery in percentage, when less than 20%, alarm, watch for monitoring number send alarm messages (default off), at the same time send alarm notification to the APP.

7.3 Voice message

Enter the voice message interface and send voice messages to APP.

7.4 The intercom

Long press key 3 to start recording, loosen the button after send the tape to the APP.

Watch received pronunciation, the screen will have phonetic symbol, short press the play button (button 3) play the tape, after all the voice broadcast marks disappear.

7.5 voice monitoring

Watch first need to set up monitoring number, issued by open voice monitoring command, the dialed number of guardianship and for one-way conversation.

7.6 Phone book

15 sets of phone numbers can be set, slide to enter the phone book, slide again for choosing number and press the number to dial out.

7.8 Turn off

Press button to turn it off on the condition of without SIM card inside, APP remote shutdown, and power off.

7.9 Answer and hang up calls

Touch key for answering calls and hang up the calls with power button.

4.3 Voice Message, enter and send voice messages to APP.

4.4 Make Friends, enter this interface and two watches touch each other to make friends, the watches send OK message when succeed, one friend only for each watch.

Replace Friends, if the watch touch with other strange watch, the former friends will be deleted and make friends with the new watch. And users also can delete the friends in APP to make new friends.

4.5Voice Record, enter the Voice Message interface and long press to record voice and send to smart phone APP. When make friends, enter the Make Friends then the users also can send voice messages to the friend' s watch.

4.6 Scanning, enter and see the big APP QR code, click the QR code, and the ID is watche ID.3.7



4.7 Pedometer, default turn off, users need turn on this function in APP, and steps shown on the watch pedometer interface.

5. The client (SeTacker App) operating instructions

5.1 App Register

Devise ID and password needed. (Register and Login as below)

Note: the ID number is unique, can not be registered repeatedly, if the ID number was registered before, please contact with the distributor and restore the ID number. Users account (4-16 numbers or letters) must be unique, different from others. The password can be modified, the ID number, user account and registered phone number needed when retrieve password. Register interface as below.

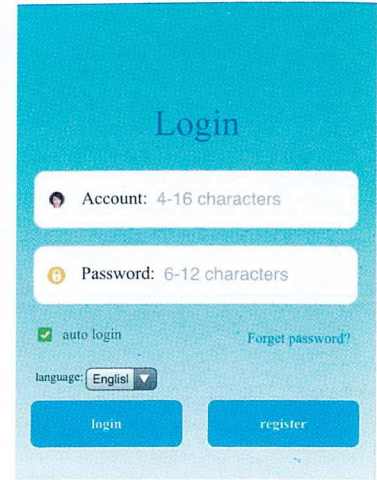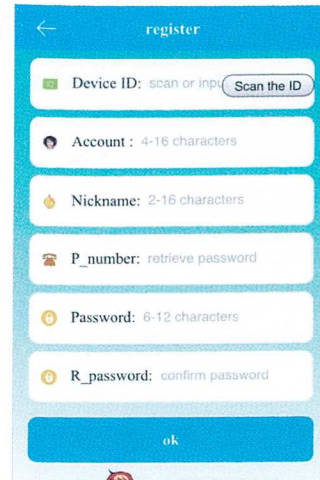

5.2 Features

5.2.1 APP Function menu interface

After registration, enter the correct account and password, click login, enter the main interface.

The main interface as below:



Part of the functions:

(1)Intercom: communicate between the watch and APP.

Send voice via APP: choose Chat function in APP, click Start record button and stop recording, the voice message(15 seconds at most) will be sent to watch, users press the watch SOS key to play the voice message.


Send voice message via watch: long press the key 3 to start recording(15 seconds at most), loosen the key to send. App will receive voice notification.

If users have made a friend with another watch, he can open the Make Friend in watch and send voice messages to friends.

(2)Map:Check the real time location of the watch.

The map can display the real time location of the watch and smart phone, click "locate" , the watch starts locating for 3 minutes, upload interval 10 seconds, restore to the default operating mode after 3 minutes. Red locating icon is for GPS positioning, blue for LBS location, green for the.

(3)Setting:Set up all functions for the watch.

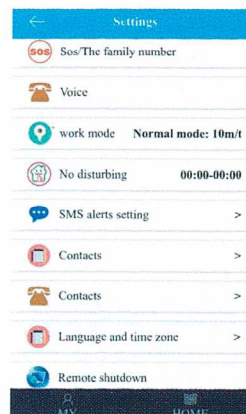

8. QR code

Scan the QR code and download the APP for android and iOS smart phones.

